


NB403T2 TRACK DRIVES 行走齿轮箱(703C2H)
NB403W2 WINCH DRIVES 卷扬齿轮箱
NB603L2 WHEEL DRIVES 轮式驱动齿轮箱

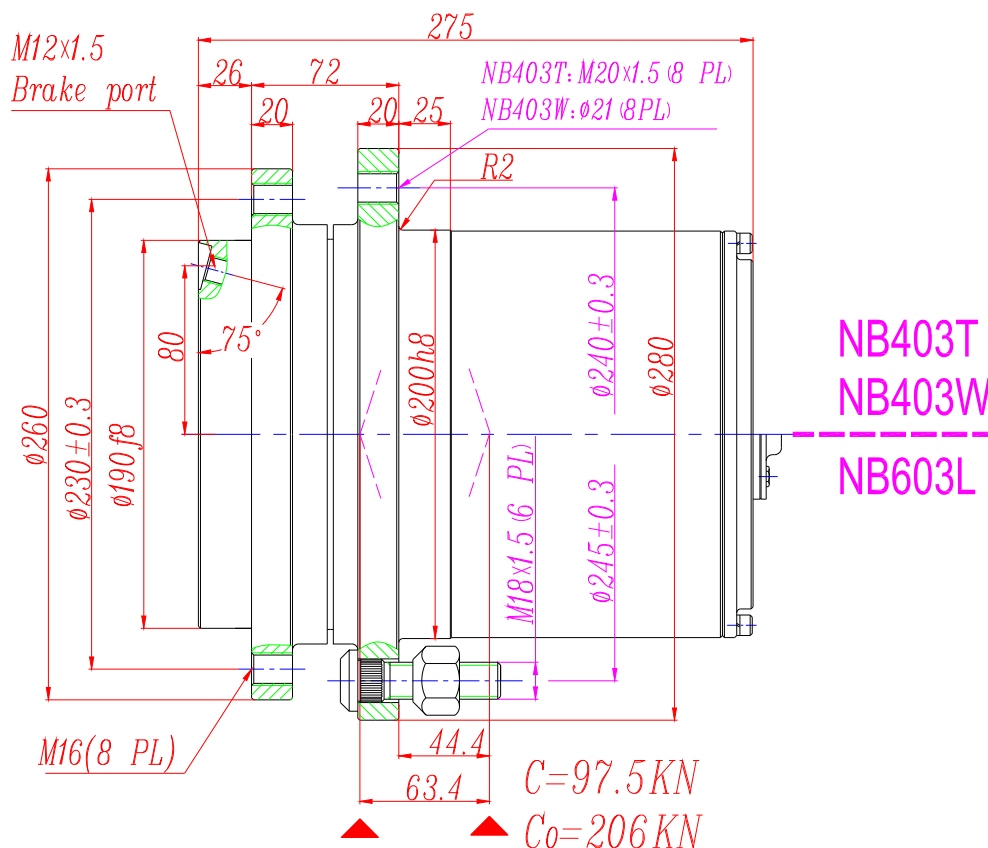

Technical specification 技术参数

Max.Output Torque 最大输出扭矩(N.m)			Ratio 减速比 (i)	Recommend Hydraulic Motor 推荐马达	Max. input speed 最大输入转速 (rpm)	Brake torque 制动扭矩 (N.m)	Brake work pressure 制动器推荐压力 (bar)
NB403T	NB403W	NB603L					
7000	4000	7000	18.6 24.4 29.3 37.1	EATON, 2K SAE A adopt SAE B adopt	4000	270	20-50

- Input rotation opposite output rotation. 输入转向与输出转向相反。
- Other ratio and other input type can special design. 其它的减速比和输入类型可特殊设计。
- If with manual disconnect application, please add mark “M” in product identification scheme end. 如果带有手动分离装置, 请在产品型号的最后标记 “M”