


NB405T2, T3 TRACK DRIVES 行走齿轮箱(705C2H)
NB405W2, W3 WINCH DRIVES 卷扬齿轮箱
NB605L2, L3 WHEEL DRIVES 轮式驱动齿轮箱

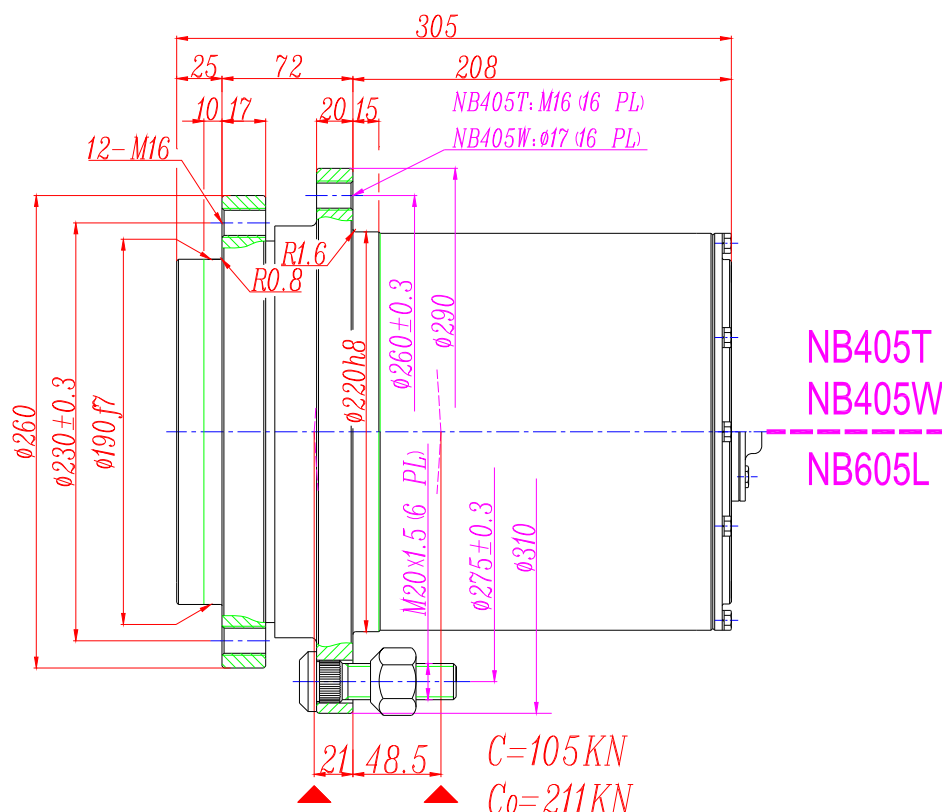

Technical specification 技术参数

Max.Output Torque 最大输出扭矩(N.m)			Ratio 减速比 (i)	Recommend Hydraulic Motor 推荐马达	Max. input speed 最大输入转速 (rpm)	Brake torque 制动扭矩 (N.m)	Brake work pressure 制动器推荐压力 (bar)
NB405T	NB405W	NB605L					
10000	7000	10000	21.5* 29.9* 48.3 55.0 68.5 79.5	EATON, 2K SAE B adopt A2FE32 A2FM56	4000	270	20-50

- Input rotation opposite output rotation. 输入转向与输出转向相反。
- Other ratio and other input type can special design. 其它的减速比和输入类型可特殊设计。
- Ratio mark * is 2 stage, when gearbox is 2 stages, the dimension 208 change to 175, 305 change to 272. *标记的减速比, 齿轮箱为2级, 当齿轮箱为2级时, 尺寸208改为175, 305改为272。
- If with manual disconnect application, please add mark "M" in product identification scheme end. 如果带有手动分离装置, 请在产品型号的最后标记 "M"