


NB405.4T2 TRACK DRIVES 行走齿轮箱
NB405.4W2 WINCH DRIVES 卷扬齿轮箱
NB605.4L2 WHEEL DRIVES 轮式驱动齿轮箱

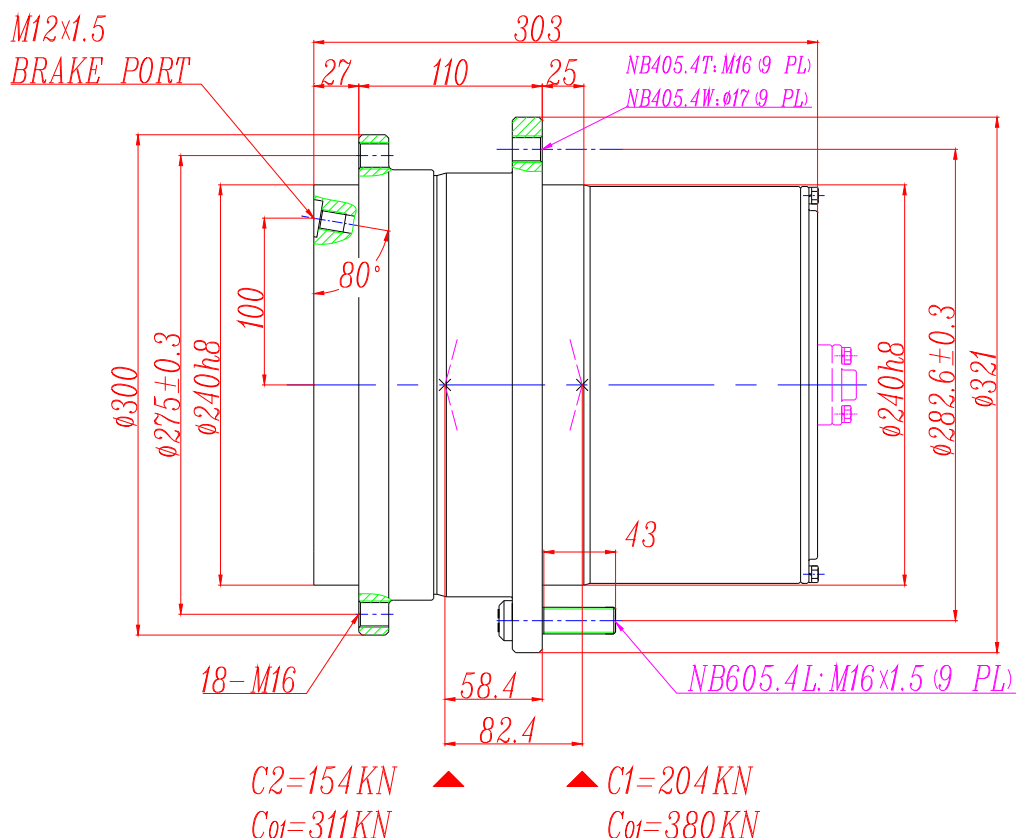

Technical specification 技术参数

Max.Output Torque 最大输出扭矩(N.m)			Ratio 减速比 (i)	Recommend Hydraulic Motor 推荐马达	Max. input speed 最大输入转速 (rpm)	Brake torque 制动扭矩 (N.m)	Brake work pressure 制动器推荐压力 (bar)
NB405.4T	NB405.4W	NB605.4L					
11000	5500	5500	26.1 30.4 36.8 43.1 45.5 56.7	A2FE45 · 56 · 63 A6VE55 SAUER L or K	4000	280	20-50

- Input rotation opposite output rotation. 输入转向与输出转向相反。
- Other ratio and other input type can special design. 其它的减速比和输入类型可特殊设计。
- If with manual disconnect application, please add mark "M" in product identification scheme end. 如果带有手动分离装置, 请在产品型号的最后标记 "M"